



**ORDER CONDITIONS**  
min. 2400 m<sup>2</sup>/colour, no one batch guarantee


<b>CONSTRUCTION</b> Structure Struktur Structuur	Tufted 1/12" Loop Tufté 1/12" Bouclé Getuftet 1/12" Schlinge Getuft 1/12" Luspool	<b>FIRE RESISTANCE</b> Comportement au feu Brennverhalten Brandgedrag	EN 13501-1 B <sub>f</sub> -s1
<b>PILE MATERIAL</b> Couche d'usure Polmaterial Poolmateriaal	100% PA6 Solution Dyed Nylon	<b>FASTNESS TO LIGHT</b> Solidité à la lumière Lichtechtheit Lichtechtheid	ISO 105-B02 ≥ 7
<b>SECONDARY BACKING</b> Dossier Rückenausstattung Rug	Back2Back: Modified bitumen 10% recycled content included	<b>RUBBING FASTNESS</b> Solidité au frottement Reibechtheit Wrijftechtheid	ISO 105-X12 ≥ 4
<b>TOTAL WEIGHT</b> Poids total Gesamtgewicht Totaal gewicht	Ca. 4.500 g/m <sup>2</sup>	<b>COLOUR FASTNESS TO WATER</b> Solidité à l'eau Wasserechtheit Waterechtheid	EN ISO 105-E01 ≥ 4
<b>PILE WEIGHT</b> Poids du velours Poleinsatzgewicht Poolgewicht	Ca. 600 g/m <sup>2</sup>	<b>THERMAL RESISTANCE</b> Résistance thermique Wärmedurchlasswiderstand Warmtedoorlaatweerstand	ISO 8302 0,081 m <sup>2</sup> K/W
<b>PILE ABOVE BACKING</b> Poids de velours utile Polnutzschichtgewicht Nuttig poolgewicht	Ca. 360 g/m <sup>2</sup>	<b>IMPACT NOISE RATING</b> Isolation phonique Trittschallverbesserungsmass Geluidsisolatie	ISO 10140 ΔL <sub>w</sub> : 25dB
<b>TOTAL HEIGHT</b> Épaisseur totale Gesamtdicke Totale hoogte	Ca. 7,2 mm	<b>SOUND ABSORPTION</b> Absorption phonique Schallabsorptionsgrad Geluidsabsorptie	ISO 354 α <sub>w</sub> : 0,15
<b>PILE HEIGHT</b> Épaisseur du velours Poldicke Poolhoogte	Ca. 3,6 mm	<b>PERMANENT ANTISTATIC</b> Antistatique permanent Permanent antistatisch Permanent antistatisch	ISO 6356 ≤ 2 kV
<b>PILE DENSITY</b> Densité du velours Polrohdichte Pooldichtheid	Ca. 0,100 g/cm <sup>3</sup>	<b>TRANSVERSAL RESISTANCE</b> Résistance transversale Durchgangswiderstand Doorgangsweerstand	ISO/DIS 10965 ≤ 10 <sup>9</sup> Ohm
<b>TUFT DENSITY</b> Nombre de touffes Noppenzahl Aantal punten	Ca. 200.000/m <sup>2</sup>	<b>SIZE</b> Dimensions Abmessung Afmetingen	50 x 50 cm
<b>CLASSIFICATION</b> Classement Klassifikation Classificatie	EN 1307 33 - LC1	<b>PACKAGING</b> Emballage Verpackung Verpakking	Box: 5 m <sup>2</sup> Pallet: 20 boxes
<b>CASTOR CHAIR SUITABILITY</b> Emploi chaise à roulettes Stuhlrolleneignung Rolstoelgeschiktheid	EN 985 A: continuous use	<b>DIMENSIONAL STABILITY</b> Stabilité dimensionnelle Dimensionsstabilität Dimensionele stabiliteit	EN 986 max. 0,2%



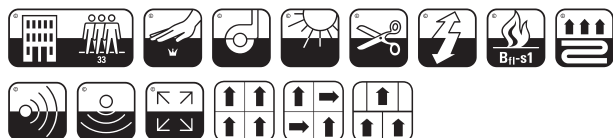


# MATRIX

**ORDER CONDITIONS**  
min. 2400 m<sup>2</sup>/colour, no one batch guarantee



**965**



**983**