



LUXURY CARPET TILES

SPEED

MOMENTUM COLLECTION

ORDER CONDITIONS

min. 1200 m²/collection, full pallets/colour, no one batch guarantee

CONSTRUCTION

Structure
Struktur
Structuur

Tufted 1/10" Loop
Tufté 1/10" Bouclé
Getuftet 1/10" Schlinge
Getuft 1/10" Luspool

PILE MATERIAL

Couche d'usure
Polmaterial
Poolmateriaal

100% PA6 Solution Dyed Nylon

SECONDARY BACKING

Dossier
Rückenausstattung
Rug

Back2Back: Modified bitumen
10% recycled content included

TOTAL WEIGHT

Poids total
Gesamtgewicht
Totaal gewicht

Ca. 4.250 g/m²

PILE WEIGHT

Poids du velours
Poleinsatzgewicht
Poolgewicht

Ca. 480 g/m²

PILE ABOVE BACKING

Poids de velours utile
Polnutzschichtgewicht
Nuttig poolgewicht

Ca. 273 g/m²

TOTAL HEIGHT

Épaisseur totale
Gesamtdicke
Totale hoogte

Ca. 6,0 mm

PILE HEIGHT

Épaisseur du velours
Poldicke
Poolhoogte

Ca. 2,5 mm

PILE DENSITY

Densité du velours
Polrohdichte
Pooldichtheid

Ca. 0,110 g/cm³

TUFT DENSITY

Nombre de touffes
Noppenzahl
Aantal punten

Ca. 176.000/m²

CLASSIFICATION

Classement
Klassifikation
Classificatie

EN 1307
33 - LC1

CASTOR CHAIR SUITABILITY

Emploi chaise à roulettes
Stuhlrolleneignung
Rolstoelgeschiktheid

EN 985
A: continuous use

FIRE RESISTANCE

Comportement au feu
Brennverhalten
Brandgedrag

EN 13501-1
B_{f1}-s1

FASTNESS TO LIGHT

Solidité à la lumière
Lichtechtheit
Lichtechtheid

ISO 105-B02
≥ 7

RUBBING FASTNESS

Solidité au frottement
Reibechtheit
Wrijftechtheid

ISO 105-X12
≥ 4

COLOUR FASTNESS TO WATER

Solidité à l'eau
Wasserechtheit
Waterechtheid

EN ISO 105-E01
≥ 4

THERMAL RESISTANCE

Résistance thermique
Wärmedurchlasswiderstand
Warmte-doorlaatweerstand

ISO 8302
0,064 m²K/W

IMPACT NOISE RATING

Isolation phonique
Trittschallverbesserungsmass
Geluidsisolatie

ISO 10140
ΔL_w: 24dB

SOUND ABSORPTION

Absorption phonique
Schallabsorptionsgrad
Geluidsabsorptie

ISO 354
α_w: 0,15

PERMANENT ANTISTATIC

Antistatique permanent
Permanent antistatisch
Permanent antistatisch

ISO 6356
≤ 2 kV

TRANSVERSAL RESISTANCE

Résistance transversale
Durchgangswiderstand
Doorgangsweerstand

ISO/DIS 10965
≤ 1 x 10⁹ Ohm

SIZE

Dimensions
Abmessung
Afmetingen

50 x 50 cm

PACKAGING



Emballage
Verpackung
Verpakking

Box: 5 m²
Pallet: 20 boxes

DIMENSIONAL STABILITY

Stabilité dimensionnelle
Dimensionsstabilität
Dimensionele stabiliteit

EN 986
max. 0,2%

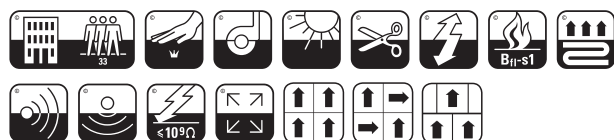

We reserve all rights for technical improvements | Technische wijzigingen voor verbetering van het product, worden voorbehouden | Sous réserve de toute modification technique avant il l'amélioration constante de nos produits | Durch technische Weiterentwicklung sind bedingte Änderungen vorbehalten

F512/02 MO11/7




LUXURY CARPET TILES

SPEED


MOMENTUM COLLECTION

ORDER CONDITIONS


min. 1200 m²/collection, full pallets/colour, no one batch guarantee



553



914



990